


JOLTING TABLE (C-125)

EN 196-1

- Used to compact cement mortar prisms in moulds.
- The 3-gang mould is placed on a table which is mounted above a cam rotating at 60 rpm.
- Equipped with digital cycle counter.
- The motor and gearbox assembly are enclosed in a protective housing; therefore, there are no moving parts in the body outside the housing.
- Mould is easily mounted and demounted.
- **Noise-Reduction cabinet (C-125/SPC)** can be purchased separately.

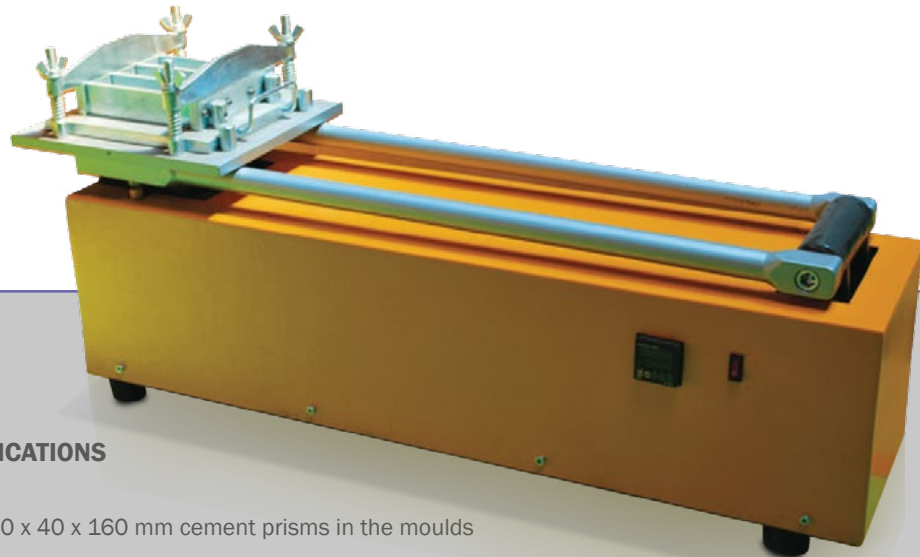

TECHNICAL SPECIFICATIONS

- Used to compact 40 x 40 x 160 mm cement prisms in the moulds
- Digital Cycle Counter
- Rotating cam driven at 60 rpm
- Table drop height : 15 mm
- 220 - 240 V / 50 Hz