


GILLMORE APPARATUS

Code : C095

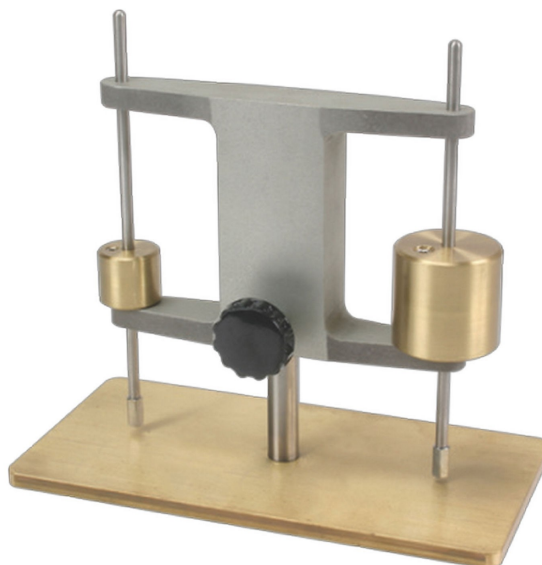

- The Gillmore Apparatus is utilized to determine the initial and final setting times of hydraulic cement paste by employing Gillmore needles, as specified in ASTM C266.
- This method assesses whether a cement sample meets the required setting time limits, ensuring compliance with relevant standards.
- The apparatus comprises two stainless steel needles: one for initial setting time and another for final setting time, each with specified weights and tip diameters.
- The initial setting time needle has a weight of 113.4 ± 0.5 g and a tip diameter of $\varnothing 2.12 \pm 0.05$ mm.
- The final setting time needle has a weight of 453.6 ± 0.5 g and a tip diameter of $\varnothing 1.06 \pm 0.05$ mm.

STANDARDS

ASTM C266 • ASTM C414 • AASHTO T154

TECHNICAL SPECIFICATIONS

- Initial setting time needle:
 - Weight: 113.4 ± 0.5 g
 - Tip: $\varnothing 2.12 \pm 0.05$ mm
- Final setting time needle:
 - Weight: 453.6 ± 0.5 g
 - Tip: $\varnothing 1.06 \pm 0.05$ mm

ORDERING INFORMATION

Item	Code
GILLMORE APPARATUS	C095X00AH